ROLLS COOLING NOZZLES

These special nozzles are used to obtain a satisfactory cooling of the rolls on casting machines with high values of width. The direction of the two jets is designed to achieve the maximum cooling efficiency over long distances.



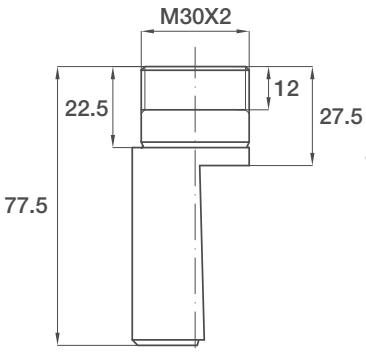

KYA 1510 XXLA

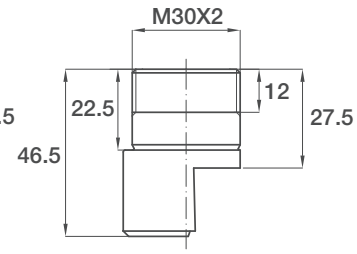

KYA 1510 XXCA

MATERIALS

T1	Brass
B31	Stainless steel AISI 316L

HOW TO ORDER PNR PRODUCTS

Model	Capacity	Material	Construction	Variation
KYA	**1510**	**XX**	**Y**	**Z**

Order example: **KYA 1510 B31 Lx**

CONSTRUCTION: Y

- **C** short body
- **L** long body

VARIATION: Z

- **A** metric thread M30x2
- **X** quick coupling

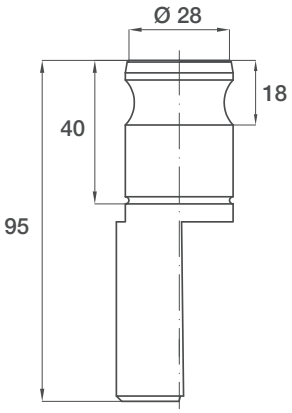

KYA 2100 XXLX



KYA 2100 XXCX

Code	Capacity - lpm							
	Pressure - bar							
	1.0	2.0	3.0	4.0	5.0	6.0	7.0	10.0
KYA 1510 xx	2.94	4.16	5.10	5.89	6.58	7.21	7.79	9.31
KYA 1790 xx	4.56	6.45	7.90	9.12	10.2	11.2	12.1	14.4
KYA 2107 xx	6.18	8.74	10.7	12.4	13.8	15.1	16.3	19.5

CONVERSION TABLE (UE - USA)

PRESSURE: 1 bar = 14,5 psi
CAPACITY: 1 lpm = 0,264 gpm