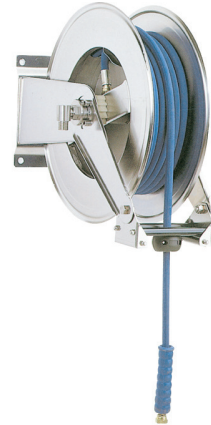


UMU L/K - AUTO-REWIND ADJUSTABLE HOSE REELS

UMU L/K models are hose reels with spring powered automatic rewind and adjustable release, suitable for industrial environments requiring efficient cleaning power. They provide quick hose direction and retraction, are wear-resistant, leak-free and handy to use. The hose can be pulled to the desired length and locked in place during use. When operation is completed, a short further pull activates a spring powered automatic rewind mechanism that returns the hose onto the reel.

UMU L/K hose reels are specially designed for swivel nozzles and can be customized in length, materials, operating pressure and temperature to satisfy your requirements.

■ Typical applications	food factories, washing lines, car wash
■ Inlet thread size	1/2", 1"
■ Outlet thread size	1/2", 1"
■ Flexible hose size	1/2", 3/4", 1"
■ Max hose length	20 M
■ Max working pressure	LP 200 bar
■ Material Body	B2 AISI 304 Stainless steel

**UMU KD20 B2HSB**

Code	LP bar	E inch	U inch	DI mm	MF inch	LF m	W kg	DE mm	H mm	S mm	Swivel code
UMU LE13 B2LSB	20	1"	1"	20	3/4"	13	18	530	550	300	XUM US20 B2
UMU LF08 B2LSB					1"	8	18				
UMU LE18 B2LSB	20	1"	1"	20	3/4"	18	24	530	550	480	XUM US22 B2
UMU LF15 B2LSB					1"	15	24				
UMU KD15 B2HSB	200	1/2"	1/2"	10	1/2"	15	13	500	480	250	XUM US15 B2
UMU KD20 B2HSB						20	18	500	480	280	XUM US20 B2

(LARGE CAPACITY AUTO - REWIND HOSE REELS) UMU J / I**UMU J/I - LARGE CAPACITY AUTO-REWIND HOSE REELS**

UMU J/I large capacity auto-rewind hose reels are recommended for working environments requiring a large capacity. UMU J/I reels have been designed to hold flexible and long hoses up to 40 meters (depending on hose diameter), and have a double retraction spring that ensure a quick and reliable hose auto-rewinding.

They are robust, wear-resistant, leak-free, powerful and adjustable. Ideal to clean long tunnels or machines from a single water feed point. They can be customized in length, materials, operating pressure and temperature to satisfy your requirements.

■ Typical applications	food factories, washing lines, car wash
■ Inlet thread size	1/2", 1"
■ Outlet thread size	1/2", 1"
■ Flexible hose size	3/8", 1/2", 3/4", 1"
■ Max hose length	40 M
■ Max working pressure	LP 200 bar
■ Material Body	B2 AISI 304 Stainless steel

**UMU ID40 B2HSB**

Spray gun is not included.

Code	LP bar	E inch	U inch	DI mm	MF inch	LF m	W kg	DE mm	H mm	S mm	Swivel code
UMU JE30 B2LSB	20	1"	1"	20	3/4"	30	40	530	550	520	Please contact our sales
UMU JF25 B2LSB				20	1"	25					
UMU ID25 B2HSB	200	1/2"	1/2"	10	1/2"	25	26	530	550	370	
UMU IC40 B2HSB				10	3/8"	40	36				
UMU ID40 B2HSB				10	1/2"	40	36	530	550	420	